

# Watershed Management and Rainwater Harvesting in Vishwaniketan Campus

<sup>1</sup> Rupesh Devale, <sup>2</sup>Sayed Sohail, <sup>3</sup>Dr. Seema Jagtap

<sup>1</sup>PG Student, Dept. of Civil Engg, Yadavrao Tasgonkar College of Engg. and Management, Chandhai, Dist. Raigad,

<sup>2</sup>M.Tech (Structure) IIT Roorkee, <sup>3</sup>Asstt. Prof. Dept of Civil Engg, Thakur College of Engg., Kandiwali, Mumbai

## ABSTRACT

Watershed management & rainwater harvesting plays a vital role in reducing soil erosion & water conservation. Many districts in coastal Maharashtra face the perennial problem of water storage despite of getting heavy rains during the monsoons lack of water is particularly acute problem during the months after the monsoon seasons. This study aims to cater the water scarcity by implementing watershed management & rainwater harvesting systems, To model & analyze watershed & Rainwater harvesting project in our college (Vishwaniketan's iMEET) area to fulfill water requirement.

**KEYWORDS:** Watershed, water scarcity, Rainwater harvesting, water reuse

## 1. INTRODUCTION

### 1.1 Watershed

Watershed is the hydro-geological unit of area from which the rain water drains through a single outlet. When rain falls on the mountains, it flows down through small streams. Many such streams join to form bigger streams, which in turn join to form rivulets, which join to form river and so on. The entire area which supplies water to a stream or rivulet or a river at a particular point in its flow is called the watershed or catchment area. The top of the watershed is called hill or ridge portion. The ridge-line partitions one watershed from all the droplets of rain within the watershed will flow from another, or can be said to be the boundary of the watershed ridge portion through different drainage lines to the valley portion of the watershed and will be drained out of the watershed through a common exit point (Refer Fig.1).

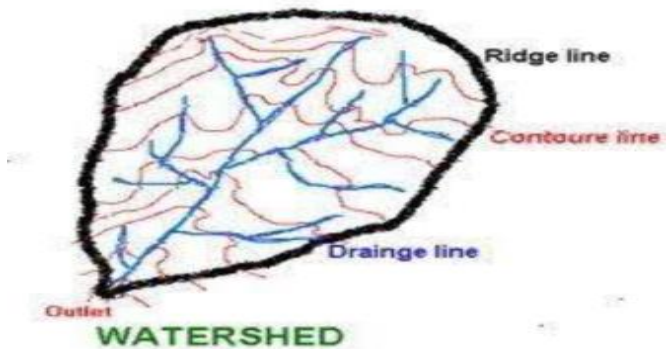


Fig. 1: Watershed Network

### 1.2 Rainwater Harvesting


The technique of rainwater harvesting involves collecting the rain from localized catchment surfaces such as roofs, plain / sloping surfaces etc., either for direct use or to augment the ground water resources depending on local conditions (Refer Fig. 2).



Fig. 2: Rainwater Harvesting

### 1.3 Watershed Management

It is a term which describes the process of implementing land use and water management practices to protect and improve the quality of water and other natural resources (Refer Fig. 3).

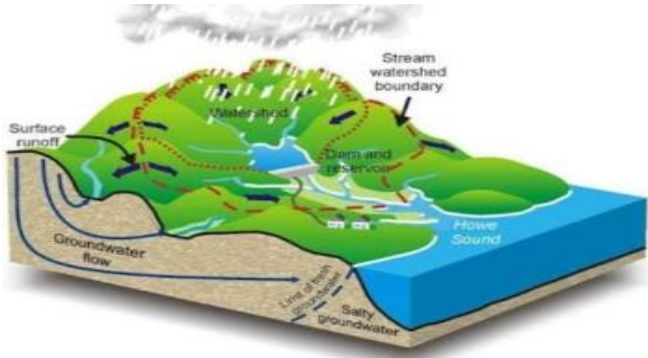

**Fig. 3:** Watershed Management Network



**Fig. 4:** Vishwaniketan Campus

## 2. LITERATURE REVIEW

The Integrated Watershed Management Programme (IWMP) one of the Flagship programme of Ministry of Rural Development is under implementation by the Department of Land Resources since 2009-10 after integrating three area development programmes namely **Desert Development Programme (DDP)**, **Drought Prone Areas Programme (DPAP)** and **Integrated Wastelands Development Programme (IWDP)**, for development of rainfed/degraded land in the country.

## 3. CASE STUDY

The area taken for study is Vishwaniketan's iMEET Khalapur which is our college area. Total campus area is 14 Acres. Campus consists of 2 colleges (Engineering & Architecture), 1 canteen, 2 gardens, 1 hostel with total population of 1800 including hostel. The daily requirement of water for domestic purpose is 72900 litres. It is located near Mumbai pune expressway. Total area taken under mini water shed project is 1.4 hect. This watershed area comes under heavy rainfall zone even then during summer season water scarcity is noticed. The entire area absorbs water, but does not retain the water, because of the slope and ground condition. As a result the area faces water scarcity in rest of the season hence we have taken the college area for the watershed management and Rainwater harvesting project (Refer Fig. 4).

## 4. PRESENT STATUS OF WATER SOURCE FOR DOMESTIC PURPOSE IN VIMEET CAMPUS

1. In a week from Monday to Saturday there is a requirement of 3 tankers per day & on Sunday it is 2 no. of tanker.
2. Here 1 tanker = 10,000 litre capacity which cost Rs.900 therefore total monthly water requirement =  $10,000 \times 20(\text{no. of tankers}) \times 4(\text{weeks}) = 8,00,000$  litres which costs approx Rs. 70,000
3. Anually = 96,00,000 lit. which cost Rs. 8,64,000
4. If we proposed watershed & rainwater harvesting in our college area.
5. Then from rainwater harvesting we can collect 66,59,933 lit. And from watershed we can collect 1,16,55,000 lit.
6. Therefore total water which we can collect from rainwater harvesting & watershed management = 1,83,14,933 lit.
7. But from which 18% of rainwater percolates in the ground therefore from watershed we get = 95,57,100 lit.
8. Hence from both watershed & rainwater harvesting we can get = 1,62,17,033 lit.

## 5. WATER REQUIREMENT IN VIMEET CAMPUS

### Basic Requirement of water per day

**1. Total No. of student in V-iMEET (Including Staff) = 1800**

(A) No. of student staying in Hostel = **180**

(B) No. of remaining student (Non-staying)  
= **1800 - 180 = 1620**


**Basic Requirement of water (As per IS 1172-1993 in lpcd)**

(A) Student staying in Hostel = 180 x 135 = 24300  
 (B) Student Non-staying in Hostel = 1620 x 30 = 48600  
**Total (A +B) = 72900 lit/day (for domestic purpose)**

**6. IMPLEMENTATION OF WORK**

**6.1 Engineering Survey**

The following fig. 5, shows contour plan of area which comes under watershed. The highlighted portion shows location of the proposed watershed tank.

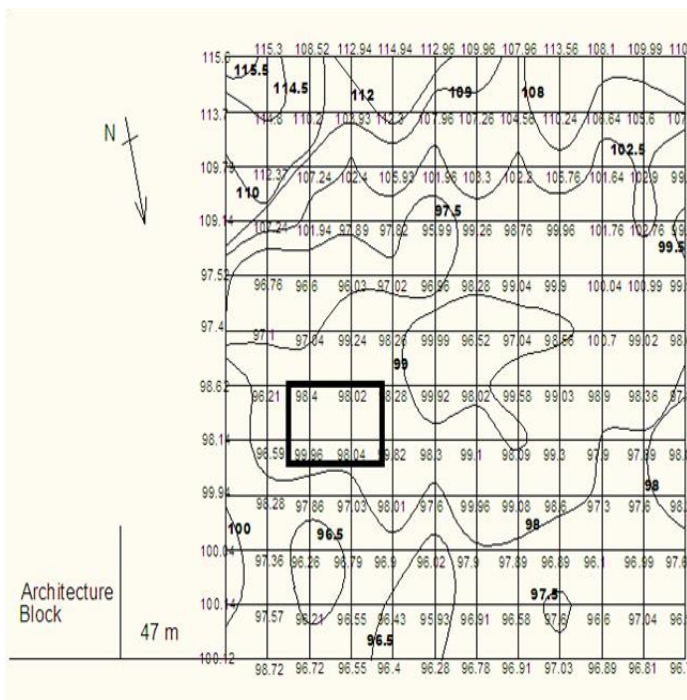

**Fig. 5: Contour Plan**

**6.2 Average Rainfall [Meteorological dept]**

Rainfall was high with average rainfall of 3336.36 mm for past 10 years. The highest rainfall in last 10 years was 3921.4mm in 2009 and lowest rainfall was 2289.4mm in 2015.

2007-3293.5 mm	2008-3489.9 mm
2009-3921.4 mm	2010-3148.6 mm
2011-3234.2 mm	2012-3375.3 mm
2013-3913.5 mm	2014-3031.8 mm
2015-2289.4 mm	2016-3670.30 mm

**6.3 Dimensions of Tank**

Tank 1 (watershed tank): **4.6 x 3.0 x 6 m**  
 Tank 2 (rainwater harvesting tank): **5.5 x 3.7 x 4 m**  
 Tank 3 & 4 (filtration tank): **5.6 x 3.8 x 3 m**


Tank 5 (storage tank): **5.5 x 3.7 x 6 m**

**6.4 Manual Design & Software Analysis for Tank 1 (watershed)**

**6.4.1 Manual Design**

1. Thickness of wall = 280mm
2. Cover = 25mm
3. Steel :

- a) On long wall : 1<sup>st</sup> at corner  
 On remote face = 16mm bar @ 45 mm c/c  
 On liquid face = 8mm bar @ 95 mm c/c  
 Vertical steel = 10mm bar @ 150 mm c/c  
 2<sup>nd</sup> at mid span  
 On remote face = 16mm bar @ 60 mm c/c  
 On liquid face = 8mm bar @ 95 mm c/c  
 Vertical steel = 10mm bar @ 150 mm c/c
- b) On short wall : 1<sup>st</sup> at corner  
 On remote face = 16mm bar @ 190 mm c/c  
 On liquid face = 8mm bar @ 95 mm c/c  
 Vertical steel = 10mm bar @ 150 mm c/c  
 2<sup>nd</sup> at mid span  
 On remote face = 16mm bar @ 260 mm c/c  
 On liquid face = 8mm bar @ 95 mm c/c  
 Vertical steel = 10mm bar @ 150 mm c/c

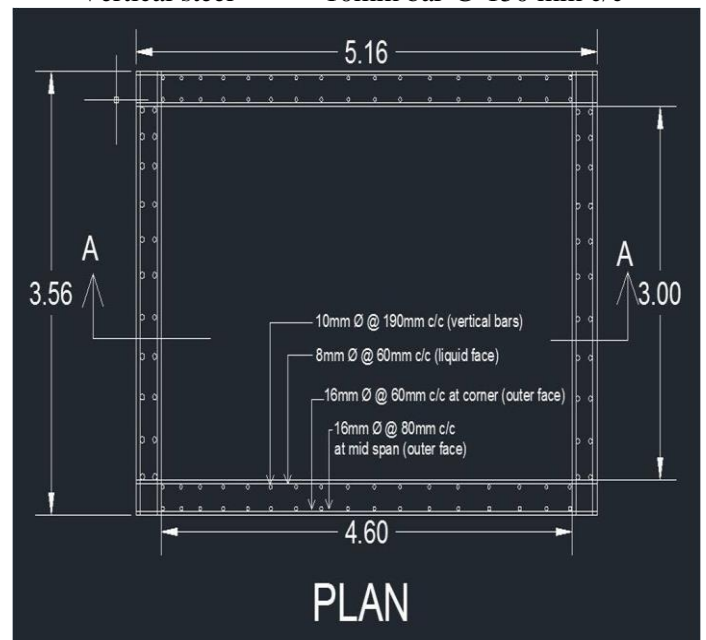

**Fig. 6: Reinforcement Details**



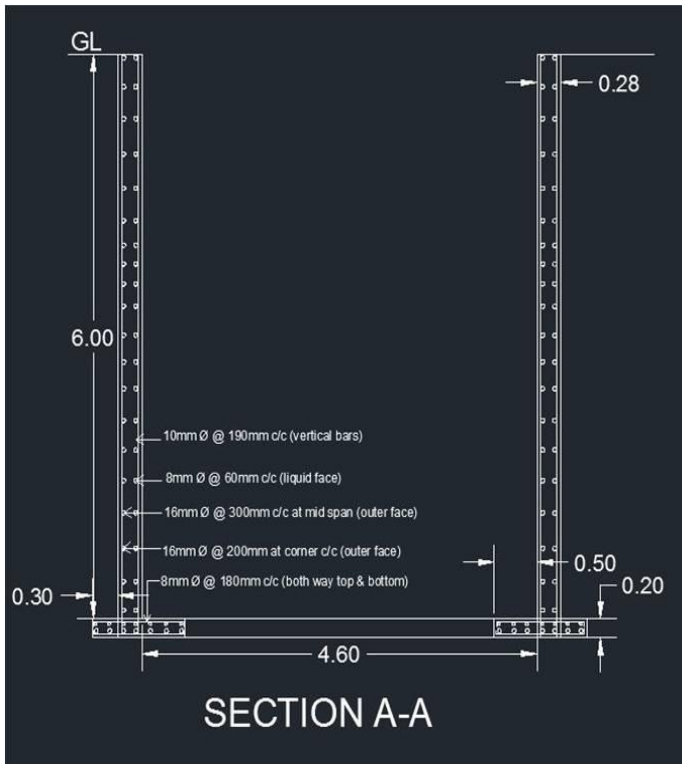


Fig. 7: Section of watershed tank (watershed)

#### 6.4.2 Software Analysis using Staad. Pro V8i

1. This software is used to do the study of load & pressure acting on tank like Hydrostatic pressure, soil pressure on the plate element.
2. It also helps to identify the safe & critical portion in a stress diagram. Also it gives the value of steel in tank design summary.

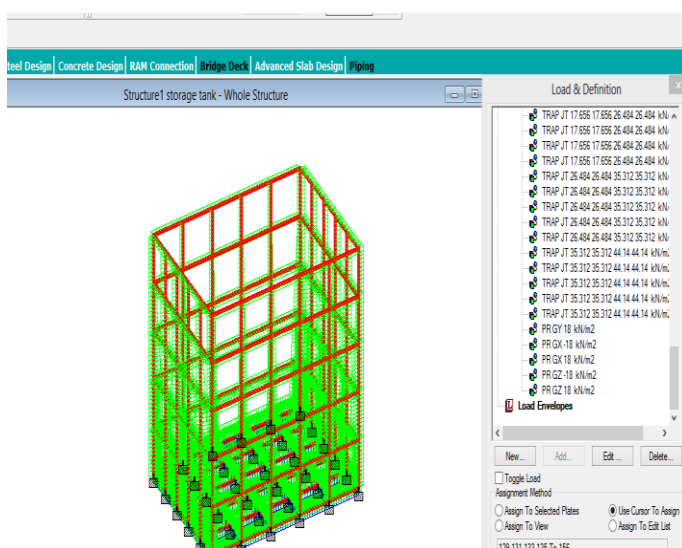


Fig. 8: Loading details of Storage tank

NOTE:

1. Similarly we had design for tank 2,3,4,5.
2. The structure proposed in the area for collection of rainwater for watershed management is like a farm pond. The reinforced cement concrete rectangle tank is proposed for collection of water. The tank 1 (watershed) will be open from top & bottom so that the rainwater should percolate into the ground for recharging the ground water table.

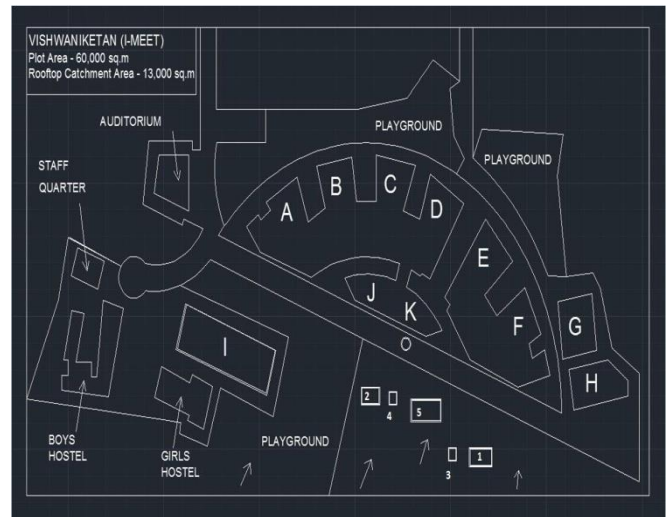


Fig. 9: Tank locations in ViMEET Campus

#### 6.5 Filtration unit & Design of Slow Sand filter


Dimensions of filter: **5.6 x 3.8 x 3.0 m**

1. The bottom layer is of gravel material of thickness 70 cm which consist of 4 layers of gravels.

Table : Materials in Filter

Gravel	Depth	Size
Bottom layer	20 cm	60 mm
Intermediate layer	20 cm	40 mm
Intermediate layer	15 cm	20 mm
Top layer	15 cm	6 mm

2. Sand layer is of 90 cm thickness
3. Supernatant height is 1.2 m
4. Under drained consist of 76 nos laterals of length 1.67m & 4.2 cm diameter place at 15 cm c/c spacing, each having 4 perforations of 13 mm size with 46 cm diameter manifold.

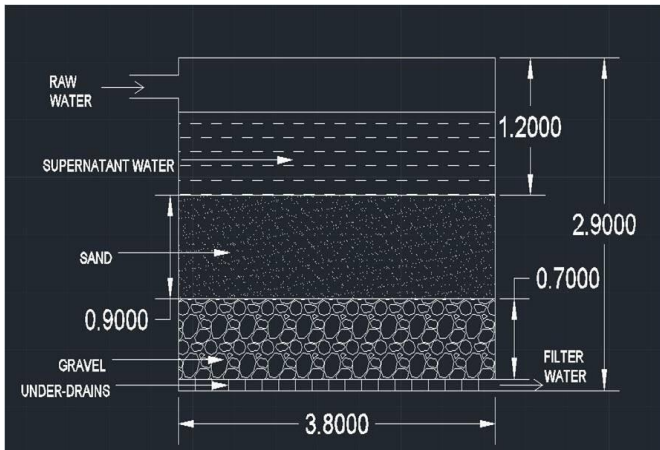

**Fig. 10: Slow Sand Filter**



**Fig. 11: Jar testing**

**ALUM DOSAGE OF 10MG/LIT IS BEST SUITED**

**NOTE:**

There will be a two filtration unit one for rainwater harvesting tank i.e. water from the roof & other for watershed tank.


**6.6 TEST CONDUCTED ON WATER**

- pH test
- Turbidity test
- Alkalinity test
- Hardness test
- Flocculation test

Test results:

Sr. No.	Test	Sample water before filtration	Sample water after filtration	Standard as per IS 10500: 1991
1	Ph	8.04	7.37	6.5 – 8.5
2	Turbidity	6.1 NTU	3.7 NTU	1 – 5 NTU
3	Alkanity	98 mg/lit	84 mg/lit	80 – 120 mg/lit
4	Hardness	372.5 mg/lit	325 mg/lit	300 – 600 mg/lit
5	Jar test (alum dosage)		10 mg/lit (ph = 6.0)	

**7.1 WATER STORAGE AND DISTRIBUTION**

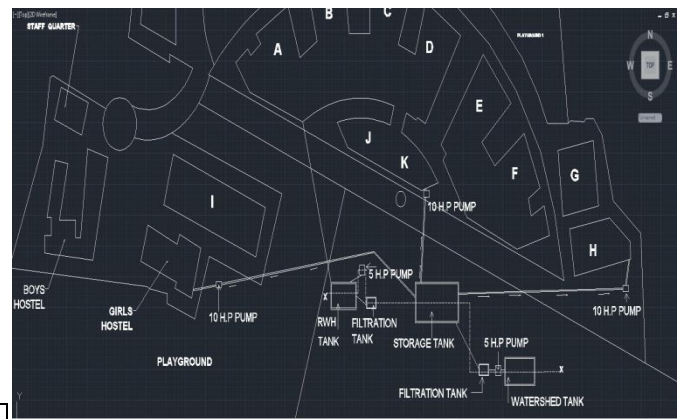

**Fig. 12: Distribution Layout**

**WATER**


1. The rain water during monsoon season is collected in watershed tank.
2. The collected water from the watershed tank is then transferred to slow sand filter unit for further purification using 5H.P motor Pump.
3. The filtered water is then transferred to storage unit by gravity.
4. Now, the water from roof top of block A & B is collected in rainwater harvesting tank.
5. From this the collected water from the rain water harvesting tank is then transferred to slow sand filter unit for further purification using 5H.P motor Pump.
6. The excess water i.e. overflows of water from the Rainwater harvesting tank can be send to the watershed tank.
7. The filtered water is then transferred to storage unit by gravity.
8. In storage tank, by using alum of 10mg/lit dosage we can see the change in colour. Also it improves the other properties of water.

9. For distribution of water from storage tank to Architecture building, Hostel & Engineering college building can be done by using 3 pump of 10 H.P.

**Important Points:**

1. The watershed tank is open from top & bottom so rain water can easily percolate underground & it will recharge the ground water table.
2. So, when the scarcity begins we can dug bore wells at the side of tank or from the existing well & can extract the water & can store in the storage tank.

**8 VISHWANIKETAN’S (IMEET) CAMPUS DETAILS & WATER TANK POSITIONS**

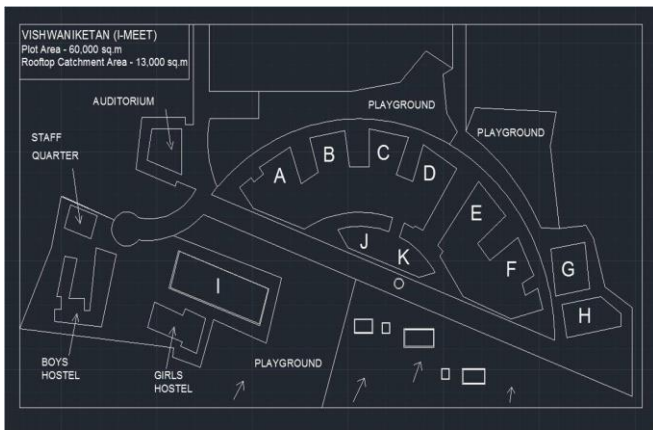

**Fig. 13:** Vishwaniketan’s Campus & Positions of water tanks

**9. METHODOLOGY:** (for project-2 i.e. Rainwater Harvesting)

**9.1. Collection of water from the into the storage tank.**

**9.2. Purification of water**

1. Filtration unit. 2. Testing of water.

**9.3. Pure water storage and distribution**

**9.4. Software to be used**

1. Primavera. 2. AutoCAD.

**10. DATA COLLECTION FOR RAINWATER HARVESTING**

1. Area of catchment **2220 sq.m**


2. Average annual rainfall **3336.79 mm**
3. Runoff coefficient **0.90**
4. Rainfall that can be harvested from the rooftop

Annual water harvesting potential =  $2220 \times 3.33 \times 0.9$   
= **66,59,933 lit.**

Approximate requirement of water/day: **72000 lit**

5. Population: **1800**

**11. LAYOUT OF PROJECT PART 1 & 2**

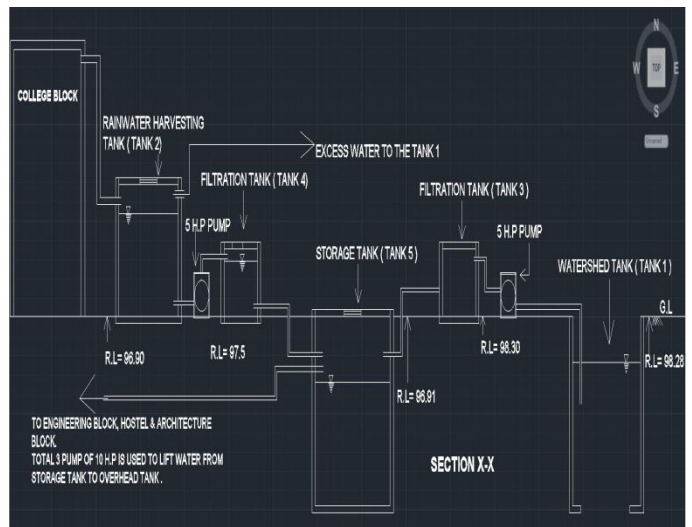

**Fig. 23:** Layout of Project Watershed Management & Rainwater Harvesting

**12. ABSTRACT SHEET**

Rates are as per DSR 2015-16 PWD Alibaug.

Sr. no	Description	Unit	Rate	Quantity	Total amount
1	Excavation for foundation	M3	217	377.12	81835.04
2	P.C.C bed of M15 grade	M3	5126	15.35	78684.10
3	R.C.C concrete of grade M25	M3	8769	161.74	1418298.06
4	Backfilling of excavated soil	M3	70.40	79.38	5588.35
5	Steel reinforcement	M.T	54784	19.04	1043354.98
6	Pipes for carrying water	RP M	700	218	152600
7	Pumps 1)10 H.P 2)5 H.P		35000 20000	3 2	105000 40000

8	Total				2925360.53
9	Contingencies – 5 %				146268.02
10	Work charged establishment – 2 %				58507.21
11	Water supply & Electric Charges – 8 %				234028.84
12	Contractors profit – 10 %				292536.05
13	<b>Total cost</b>				<b>36,56,700/-</b>

## NOTE

The investment for the project is 36,56,700/- which is high but it can be recovered within 5 years. As already mentioned our college is spending 8 lakhs annually.

## 14. CONCLUSIONS

The technique of watershed management & rainwater harvesting is best suited. By this method ground water table increases thus providing sufficient water during summer season & reducing the call of tankers on which a lot of money is spent. The initial cost of the project is high but it is economical. The structure of tank is made by using R.C.C which can last for many years.

## 15. REFERENCES

- [1] Patil S.G (2013), Watershed Management in Rural Area –A Case study, International journal of Engineering Science and Technology (IJEST), Vol1 Issue 1, pp 1-3
- [2] Mrs. V.A. Swami (2011) ‘‘Model Watershed Management plan for Shivapur Village’’ International journal Vol.2 Issue 12, pp 1-5
- [3] IS 3390:2009-Specification for reinforced cement concrete tank design.
- [4] IS 11401:1990-Specification for slow and rapid sand filter.
- [5] IS 8419:1977-Specification for requirement of filtration equipment.
- [6] IS 8419:1984-Specification for requirement of rapid & slow sand filtration equipment.